



**LiftsTrade**.com  
One Stop Lift Shop

TM

11  
12  
13  
14  
15

**LiftsTrade Pvt Ltd**

We Rise byt Lifting Others

LIFTSTRADE IS ONE OF THE LARGEST  
EXPORTERS FOR THE INDIAN  
MANUFACTURED EQUIPMENTS

# A GLOBAL SUPPLIER





LiftsTrade.com  
One Stop Lift Shop



HIGH QUALITY COST EFFECTIVE SOLUTIONS



**EXCLUSIVELY DESIGNED**  
FOR INDIA



## QUALITY FIRST

Lifts Trade is Certified for its Quality Management system ISO 9001:2015 for Designing, Engineering, Manufacturing, Installation, After Sale Service and Imports / Exports of Lifts and Escalators.

Lifts Trade Pvt Ltd is IAS Accredited, which is a member of the Multilateral IAF recognition Arrangement by LMS certification limited - Certificate Number: IN84450A IAS UIC number: MSCB13253514;

The Quality management system is also certified by American Board of Accreditations Services with certificate number 1218QMS3144 Lifts Trade Pvt Ltd are CE certified by UKCert with certificate number CE-1221 and has been independently assessed and is compliant with the requirements of Low Voltage Directive (LVD) 73/23/EEC "CE Marking" Directive 93/68/EEC Electromagnetic Compatibility (EMC) 89/336/EEC by GQNet Certificate No: IN84473U

ABAS also certified the products for CE marking according to the Lift Safety and Machinery Directive. Certificate No: 0119CE3157 Lifts Trade Pvt Ltd is Certified for its Quality Management system ISO 9001:2015 for Designing, Engineering, Manufacturing, Installation, After Sale Service and Imports / Exports of Lifts and Escalators.



Collapsible Gates



IFG / Accordion Gates




MS Powder Small Vision  
Semi Automatic Door



SS Big Vision Semi  
Automatic Door



MS Powder Coated Manual  
Telescopic Doors with Small Vision

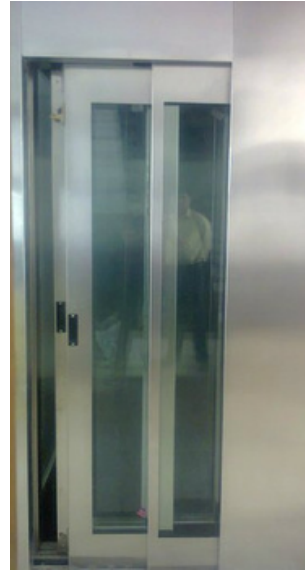

SS Glass Manual Telescopic  
Doors with Big Vision



MS Powder Coated Automatic  
Telescopic Doors Plain Doors



SS Glass Automatic Telescopic  
Doors with Big Vision




SS Plain Automatic Center  
Opening Door



SS Small vision holes Automatic  
Center Opening Door



SS Small vision glass Center  
opening Automatic Door

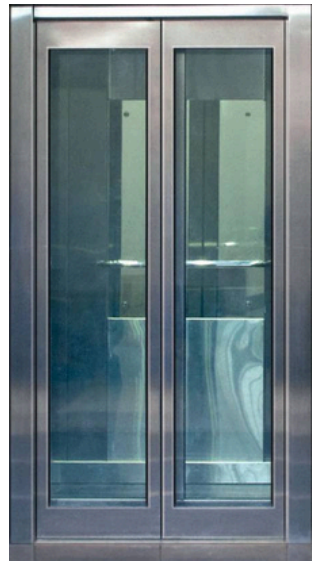

SS Glass Automatic Center  
opening Doors with Big Vision



SS Full vision glass Telescopic Automatic Door



SS Full vision glass Center opening Automatic Door



SS Gold finished Big vision glass Center opening Automatic Door



Car Operating Panel & Hall Button Station

ONE STOP LIFT SHOP  
PRESENTS

LIFTS TRADE PVT LTD

[WWW.LIFTSTRADE.COM](http://WWW.LIFTSTRADE.COM)



**LiftsTrade.com**

One Stop Lift Shop





**LiftsTrade**.com

One Stop Lift Shop

TECHNICAL SUPPORT AND RELIABLE AFTER  
SALES SUPPORT

LIFTSTRADE PVT LTD - ONE STOP LIFT SHOP



**Passenger Lift** — A lift designed for the transport of passengers.

**Goods Lift** — A lift designed primarily for the transport of goods.

**PM Lifts or Goods cum passenger lift** -- A lift designed for goods but which may carry a lift attendant or other person necessary for the unloading and loading of goods.

**Kitchen Lift (Dumb-Waiter)** — A lift with a car which moves in guides in a vertical direction; has net floor area of 1 m<sup>2</sup>, total inside height of 1.25 m, whether or not provided with fixed or removable shelves; and capacity not exceeding 250 kg; and is exclusively used for carrying materials and shall not carry any person.

**Hospital Lift** - A lift normally installed in a hospital/dispensary/clinic and designed to accommodate one number bed/stretcher along with its depth, with sufficient space around to carry a minimum of three attendants in addition to the lift operator.

The dimensions of the well have been chosen to accommodate the doors inside the well which is normal practice. In special cases, the doors may be accommodated in a recess in the front wall, for which prior consultation shall be made with the lift manufacturer.

All plan dimensions of the lift well are the minimum clear plumb sizes. The architect, in conjunction with the builder, shall ensure that adequate tolerances are included in the building design so that the specified minimum clear plumb dimensions are obtained in the finished work.

**NOTE** —The words 'clear plumb dimensions' should be noted particularly in the case of high rise buildings.

Rough openings in concrete or brick walls to accommodate landing doors depend on the design.

It is advisable to provide sufficient allowances in rough opening width to allow for alignment errors of openings at various landings.

Where more than one lift is located in a common well, a minimum allowance of 100 mm for separator beams shall be made in the widths

‘Where governor operated counterweight safety is required and values should be revised in consultation with the lift manufacturer.

For outline dimensions of lifts having more than one car entrance, lift manufacturer should be consulted.

The outline dimensions of machine-room, pit depth, total headroom,

overhead distance and sill for four classes of lifts to which the standard applies are specified in Tables 1 to 4 as indicated below:

#### Passenger lifts

Each passenger load should be provided as 68 kgs and 1.8 sqft minimum size and 2 sqft maximum size should be provided.

#### Goods Lifts:

Size should be calculated according to the density of the material which should be shifted between floors.

The pit depth of the lifts will normally accommodate compensating chains. If compensating ropes are required, pit depth shall be increased for all loads and speeds and the lift manufacturer should be consulted.



Minimum floor to floor height for landings on the same side for horizontally sliding door is  $f+750\text{mm}$  and for vertically bi-parting doors is  $1.5f+250\text{mm}$ , where 'f' is clear entrance height in mm.

Electrical traction lifts are best suited for daily use. These lifts are generally come with 110 starts per hour and can go a maximum of up to 250 starts per hour.

Traction elevators, lift well consists of the pit, travel space, headroom, machine room.

Installation process:

Before starting the installation process, general arrangements are more important. The walls should be with a 9-inch red brick wall or 6 inches concrete wall.

The lift shaft dimensions need to be checked on every floor, pit size from the final ground level to the bottom level should be according to the standard and should be noted.

Scaffoldings should be made according to the requirement of the installation drawings.

Whitewash or any bright colour inside the shaft should be painted.

The installation team may give hole markings and 6 inches holes should be made, in case of a brick wall or chemical grouting can also be done. If in the case of a concrete wall, then anchoring can be done.

Once the hole is made, the brackets can be fixed, plastering should be done.

The brackets will be aligned in such a way according to the drawings given by the manufacturer. The distance between car brackets and counter brackets should be maintained.

Guide rails will be installed and the alignment of the same should be done. In the case of a hydraulic lift, the cylinder also should be fixed inside the shaft.

Door frames should be aligned and fixed on all the floors.

Machine bed should be made with the support of meson and it should be water level. Pit beds should also be made for springs. From the final floor levels, the spring should be at 300 mm.

Machine shifting can be done on the aligned machine bed or channels in the machine room.

Car safety sling and counter-frame installation can be done with taken support of the machine main sheave pulley through ropes.

Landing doors installation can be done.

A cabin can be installed and alignment can be done.

Cabin door installation can be done and aligned with the landing doors.

Balancing by adjusting weights can be done and a later half load of the maximum capacity of the cabin can be done.



ADJUSTABLE

# BRACKETS



Grouting Brackets

Sheet Bended Brackets



Combination Brackets

Lifts Trade manufacturers all types of brackets apart from manufacturing we also have stock of brackets which are manufactured from several engineering companies by job work..



GUIDE CLIPS &  
**GUIDE RAILS**

T guide clips



**Guide Rails**




Imported Guide Rails  
10+5

Imported Guide Rails  
9+5

Marrazi Guide Rails  
10+5

Standard guide clips set





**LiftsTrade.com**

One Stop Lift Shop

**COLLAPSIBLE**

# **DOOR FRAMES**

## **Red Oxide Door Frames**

1 mm, 1.2 mm

1.6mm, 2 mm

## **MS Powder Coated DF's**

1 mm, 1.2 mm

1.6mm, 2 mm

## **SS 202 Door Frames**


1 mm, 1.2 mm

## **SS 304 Door Frames**

1 mm, 1.2 mm

Aluminium Sill

All the above prices are without Sill and for openings upto 910 mm

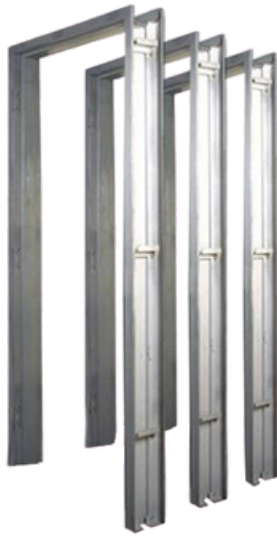



**LiftsTrade.com**  
One Stop Lift Shop

**AUTOMATIC & TELESCOPIC  
MANUAL DOORS**

# **DOOR FRAMES**

MS Powder Coated DF's

SS 202 Door Frames Matt Finish

SS 202 Door Frames Mirror Finish

SS 202 (Gold / Bronze/ Rose Gold/ Black) - Matt

SS 202 Gold / Bronze/ Rose Gold/ Black - Mirror


SS 304 Door Frames Matt Finish

SS 304 Door Frames Mirror Finish

SS 304 Gold / Bronze/ Rose Gold/ Black- Matt

SS 304 Gold / Bronze/ Rose Gold/ Black - Mirror

GI Wooden Finished Door Frames

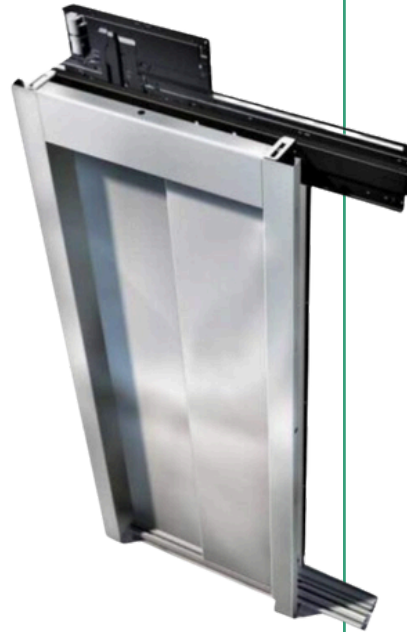

**COLLAPSIBLE**  
**GATES**

Lifts Trade Supplies all kind  
of Collapsible gates at  
lowest prices



**Collapsible Heavy duty**  
**Gates 8 Channels - For 910mm Door Frames**



ALL TYPES OF

**SWING  
DOORS**

MS Big Vision

SS 202 Matt Big Vision

SS 202 Mirror Big Vision

SS 202 Matt Big Vision - (Gold / Bronze / Rose Gold / Black)

SS 202 Mirror Big Vision - (Gold / Bronze / Rose Gold / Black)

SS 304 Matt Big Vision

SS 304 Mirror Big Vision

SS 304 Matt Big Vision - (Gold / Bronze / Rose Gold / Black)

SS 304 Mirror Big Vision - (Gold / Bronze / Rose Gold / Black)

MS Half Vision

SS 202 Matt Half Vision

SS 202 Mirror Half Vision

SS 202 Matt Half Vision - (Gold / Bronze / Rose Gold / Black)

SS 202 Mirror Half Vision - (Gold / Bronze / Rose Gold / Black)

SS 304 Matt Half Vision

SS 304 Mirror Half Vision

SS 304 Matt Half Vision - (Gold / Bronze / Rose Gold / Black)

SS 304 Mirror Half Vision - (Gold / Bronze / Rose Gold / Black)

MS Small Vision

SS 202 Matt Small Vision

SS 202 Mirror Small Vision

SS 202 Matt Small Vision - (Gold / Bronze / Rose Gold / Black)

SS 202 Mirror Small Vision - (Gold / Bronze / Rose Gold / Black)

SS 304 Matt Small Vision

SS 304 Mirror Small Vision

SS 304 Matt Small Vision - (Gold / Bronze / Rose Gold / Black)

SS 304 Mirror Small Vision - (Gold / Bronze / Rose Gold / Black)



ALL TYPES OF

# AUTOMATIC DOOR PANELS

MS Big Vision  
SS 202 Matt Big Vision  
SS 202 Mirror Big Vision  
SS 202 Matt Big Vision - (Gold / Bronze / Rose Gold / Black)  
SS 202 Mirror Big Vision - (Gold / Bronze / Rose Gold / Black)  
SS 304 Matt Big Vision  
SS 304 Mirror Big Vision  
SS 304 Matt Big Vision - (Gold / Bronze / Rose Gold / Black)  
SS 304 Mirror Big Vision - (Gold / Bronze / Rose Gold / Black)

MS Half Vision  
SS 202 Matt Half Vision  
SS 202 Mirror Half Vision  
SS 202 Matt Half Vision - (Gold / Bronze / Rose Gold / Black)  
SS 202 Mirror Half Vision - (Gold / Bronze / Rose Gold / Black)  
SS 304 Matt Half Vision  
SS 304 Mirror Half Vision  
SS 304 Matt Half Vision - (Gold / Bronze / Rose Gold / Black)  
SS 304 Mirror Half Vision - (Gold / Bronze / Rose Gold / Black)

MS Small Vision  
SS 202 Matt Small Vision  
SS 202 Mirror Small Vision  
SS 202 Matt Small Vision - (Gold / Bronze / Rose Gold / Black)  
SS 202 Mirror Small Vision - (Gold / Bronze / Rose Gold / Black)  
SS 304 Matt Small Vision  
SS 304 Mirror Small Vision  
SS 304 Matt Small Vision - (Gold / Bronze / Rose Gold / Black)  
SS 304 Mirror Small Vision - (Gold / Bronze / Rose Gold / Black)



**UP TO 800 MM CLEARING OPENING ONLY**

ALL TYPES OF

# MANUAL TELESCOPIC DOORS

Lifts Trade manufactures  
and supplies all types of  
Manual Telescopic doors.

MS Doors with Small Vision

MS Doors with Big Vision

SS 202 Doors with Small Vision

SS 202 Doors with Big Vision

SS 304 Doors with Small Vision

SS 304 Doors with Big Vision



**ALL TYPES OF  
AUTOMATIC TELESCOPIC  
DOORS AND DOOR  
OPERATORS**

Lifts Trade manufactures and supplies all Brands of Automatic Telescopic doors fermator, Wittur, Genesis, Techno and also local doors..

MS Doors with Small Vision


MS Doors with Big Vision

SS 202 Doors with Small Vision

SS 202 Doors with Big Vision

SS 304 Doors with Small Vision

SS 304 Doors with Big Vision

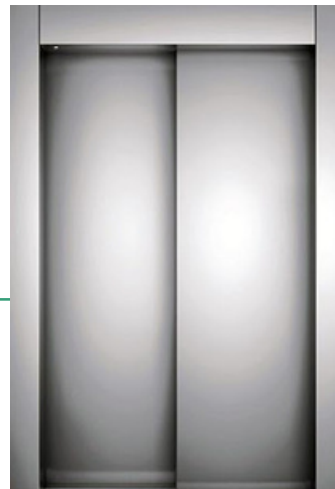

ALL TYPES OF

# AUTOMATIC CENTER OPENING DOORS AND DOOR OPERATORS

Lifts Trade manufactures and supplies all Brands of Automatic Mid opening doors Fermator, Wittur, Genesis, Techno and also local doors.

MS Doors with Small Vision


MS Doors with Big Vision

SS 202 Doors with Small Vision

SS 202 Doors with Big Vision

SS 304 Doors with Small Vision

SS 304 Doors with Big Vision

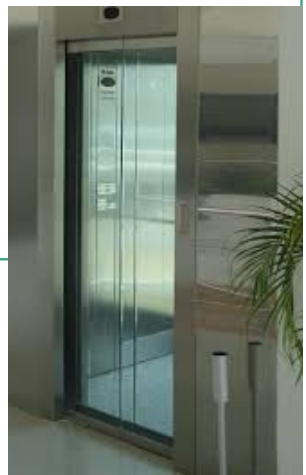




**LiftsTrade.com**  
One Stop Lift Shop


**ELEVATOR**

# TROUGHS AND CABLE TRAYS

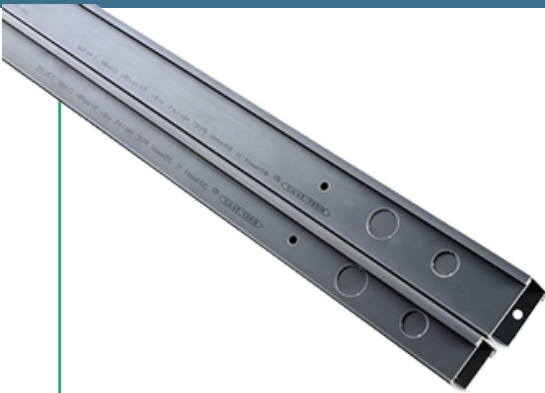

Lifts Trade manufactures  
GI Troughs and supplies  
plastic troughs as well

ALL TYPES OF  
**CAR SAFETY FRAMES**  
**CAR FRAME FOR  
MACHINE ROOM LIFT**

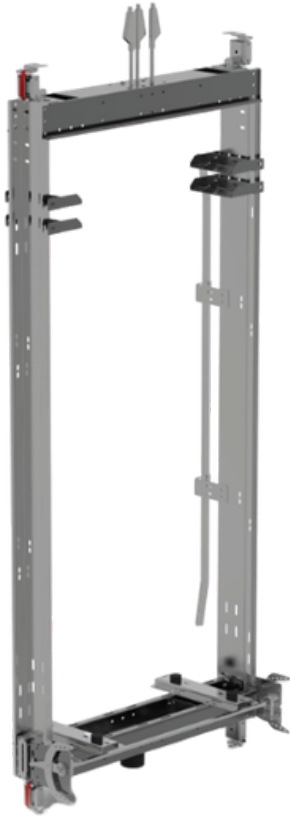

**GENERAL FEATURES**

- Max. P+Q = 1400 Kgs
- Max. V = 1.75 m/s
- Min. DBG = 500 mm
- Max. DBG = 1400mm
- Interior clear frame width or Cabin Outside : DBG 80 (mm)
- Maximum interior clear frame height : 2800 mm
- Adjustable guide shoes with the combination of cellular polyurethane Roller & liner

**INCLUDES**

- Wedge Socket Bolt for for rope  $\varnothing$  8, 10 or 13
- Car Steadier Brackets
- Guide shoes
- Cutting CAM Angle with Bracket

**OPTIONAL**

- Isolation Frame with Rubber Pads
- Compensating rope fixing
- Oiler Cups for Guide

**SPECIAL FEATURE**

- Progressive Gear CE Compliant – Certificate No : 26339
- Set on Isolation system which allows its actuation without deformation
- Guide Rail Size of 9, 10 & 16 mm
- Max. speed: 2.75 m/s & Tripping speed: 3.0 m/s



**LiftsTrade.com**

One Stop Lift Shop

ALL TYPES OF  
**CAR SAFETY FRAMES**  
**CAR FRAME FOR MRL  
BOTTOM PULLEY**



**PRODUCTION DESCRIPTION**

- 2 Pulleys on Bottom With 140mm CTC from Car Guide with 140mm CTC from Car Guide.
- Side Counterweight Frame.
- Options for wire rope type and belt type machines.

**GENERAL FEATURES**

- Max. P+Q = 1400 KGS
- Max. V = 1.75 m/s
- Min. DBG = 500 mm
- Max. DBG = 1400 mm
- Interior clear frame width or Cabin Outside : DBG 80 (mm)
- Maximum interior clear frame height : 2300 mm
- Adjustable guide shoes with the combination of cellular polyurethane Roller & liner

**INCLUDES**

- Wedge Socket Bolt for for rope Ø 8, 10 or 13
- Car Steadier Brackets
- Guide shoes

Cutting CAM Angle with Bracket

•

**OPTIONAL**

- Isolation Frame with Rubber Pads
- Compensating rope fixing
- Oiler Cups for Guide

**SPECIAL FEATURE**

- Progressive Gear CE Compliant – Certificate No : 26339
- Set on Isolation system which allows its actuation without deformation
- Guide Rail Size of 9, 10 & 16 mm
- Max. speed: 2.75 m/s & Tripping speed: 3.0 m/s

Lifts Trade manufacturers and also supplies all types of Car frames, Sheet metal, C channel and many more.




**LiftsTrade.com**

One Stop Lift Shop

ALL TYPES OF

## CAR SAFETY FRAMES

### FOR MRL BOTTOM DIAGONAL PULLEY

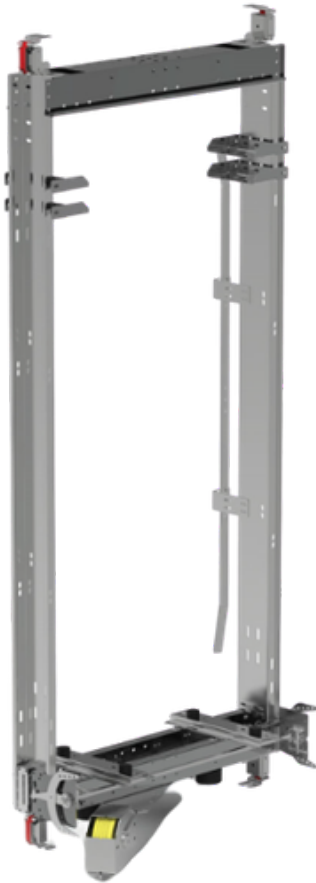

#### PRODUCTION DESCRIPTION

- 2 Pulleys on bottom with an offset angle of 20° to 30° in a diagonal position.
- Side Counterweight
- Options for wire rope type and belt type machines

#### GENERAL FEATURES

- Max. P+Q = 1400 KGS
- Max. V = 1.75 m/s
- Min. DBG = 500 mm
- Max. DBG = 1400 mm
- Interior clear frame width or Cabin Outside : DBG 80 (mm)
- Maximum interior clear frame height : 2300 mm
- Adjustable guide shoes with the combination of cellular polyurethane Roller & liner

#### INCLUDES

- Wedge Socket Bolt for for rope  $\varnothing$  8, 10 or 13
- Car Steadier Brackets
- Guide shoes
- Cutting CAM Angle with Bracket

#### OPTIONAL

- Isolation Frame with Rubber Pads
- Compensating rope fixing
- Oiler Cups for Guide

#### SPECIAL FEATURE

- Progressive Gear CE Compliant – Certificate No : 26339
- Set on Isloation system which allows its actuation without deformation
- Guide Rail Size of 9, 10 & 16 mm
- Max. speed: 2.75 m/s & Tripping speed: 3.0 m/s


Lifts Trade manufacturers and also supplies all types of Car frames, Sheet metal, C channel and many more.



ALL TYPES OF

## CAR SAFETY FRAMES

### FOR MRL TOP PLUS SINGLE PULLEY

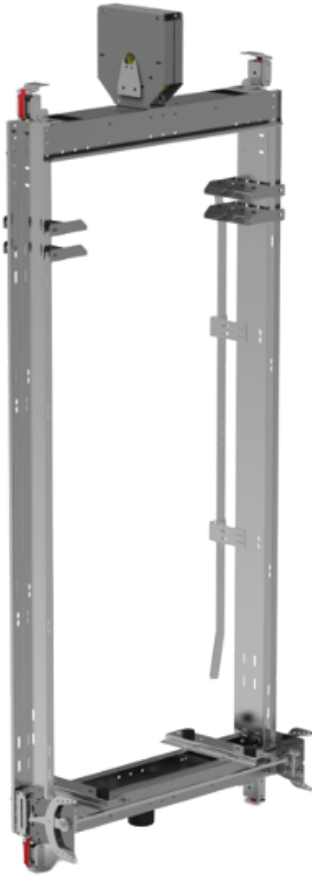

#### PRODUCTION DESCRIPTION

- 1 Pulley on top with back counterweight
- Options for wire rope type and belt type machines

#### GENERAL FEATURES

- Max. P+Q = 1400 KGS
- aMin. DBG = 500 mm
- Max. DBG = 1400 mm
- Interior clear frame width or Cabin Outside : DBG 80 (mm)
- Maximum interior clear frame height : 2300 mm
- Adjustable guide shoes with the combination of cellular polyurethane Roller & liner

#### INCLUDES

- Wedge Socket Bolt for for rope  $\varnothing$  8, 10 or 13
- Car Steadier Brackets
- Guide shoes
- Cutting CAM Angle with Bracket

#### OPTIONAL

- Isolation Frame with Rubber Pads
- Compensating rope fixing
- Oiler Cups for Guide

#### SPECIAL FEATURE

- Progressive Gear CE Compliant – Certificate No : 26339
- Set on Isolation system which allows its actuation without deformation
- Guide Rail Size of 9, 10 & 16 mm
- Max. speed: 2.75 m/s & Tripping speed: 3.0 m/s

Lifts Trade manufacturers and also supplies all types of Car frames, Sheet metal, C channel and many more.




**LiftsTrade.com**

One Stop Lift Shop

ALL TYPES OF

## CAR SAFETY FRAMES FOR MRL TOP PLUS DOUBLE PULLEY

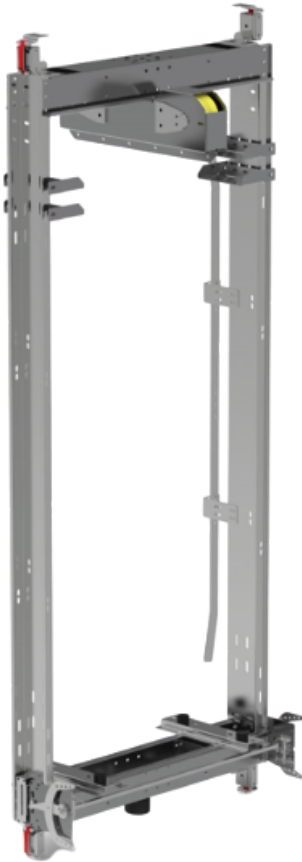

### PRODUCTION DESCRIPTION

- 2 Pulleys on top with back counterweight.
- Options for wire rope type and belt type machines

### GENERAL FEATURES

- Max. P+Q = 1400 KGS
- Max. V = 1.75 m/s
- Min. DBG = 500 mm
- Max. DBG = 1400 mm
- Interior clear frame width or Cabin Outside : DBG 80 (mm)
- Maximum interior clear frame height : 2300 mm
- Adjustable guide shoes with the combination of cellular polyurethane Roller & liner

### INCLUDES

- Wedge Socket Bolt for for rope  $\varnothing$  8, 10 or 13
- Car Steadier Brackets
- Guide shoes
- Cutting CAM Angle with Bracket

### OPTIONAL

- Isolation Frame with Rubber Pads
- Compensating rope fixing
- Oiler Cups for Guide

### SPECIAL FEATURE

- Progressive Gear CE Compliant – Certificate No : 26339
- Set on Isolation system which allows its actuation without deformation
- Guide Rail Size of 9, 10 & 16 mm
- Max. speed: 2.75 m/s & Tripping speed: 3.0 m/s

Lifts Trade manufacturers and also supplies all types of Car frames, Sheet metal, C channel and many more.



ALL TYPES OF  
**CAR SAFETY FRAMES**  
FOR MRL CANTILEVER  
HIGH PIT



**PRODUCTION DESCRIPTION**

- Minimum Pit of 300 mm
- Suitability to Machine Sheaves of 160 mm, 200 mm & 320 mm
- Installation for minimum 1100 mm Shaft Width & Depth
- Standard Overhead of 3000 mm
- Systems can be provided for minimum 2600 mm overhead
- Wall to CWT Guide - 95 mm to 110 mm
- CWT Guide to Car Guide - 160 mm to 320 mm

**GENERAL FEATURES**

- Max. P+Q = 1400 KGS
- Max. V = 1.75 m/s
- Min. DBG = 500 mm
- Max. DBG = 1400 mm
- Interior clear frame width or Cabin Outside : DBG 80 (mm)
- Maximum interior clear frame height : 2300 mm
- Adjustable guide shoes with the combination of cellular polyurethane Roller & liner

**INCLUDES**

- Wedge Socket Bolt for for rope  $\varnothing$  8, 10 or 13
- Car Steadier Brackets
- Guide shoes
- Cutting CAM Angle with Bracket

**OPTIONAL**

- Isolation Frame with Rubber Pads
- Compensating rope fixing
- Oiler Cups for Guide

**SPECIAL FEATURE**

- Progressive Gear CE Compliant – Certificate No : 26339
- Set on Isolation system which allows its actuation without deformation
- Guide Rail Size of 9, 10 & 16 mm
- Max. speed: 2.75 m/s & Tripping speed: 3.0 m/s

Lifts Trade manufacturers and also supplies all types of Car frames, Sheet metal, C channel and many more.



ALL TYPES OF

## CAR SAFETY FRAMES

## FOR MRL CANTILEVER LOW PIT



### PRODUCTION DESCRIPTION

- Minimum Pit of 150 mm
- Suitability to Hydraulic Piston of 150 mm
- Installation for minimum 1100 mm Shaft Width & Depth
- Standard Overhead of 3000 mm
- Systems can be provided for minimum 2600 mm overhead
- Wall to CWT Guide - 95 mm to 110 mm
- CAR Guide to CABIN OUT - 140

### GENERAL FEATURES

- Max. P+Q = 1400 KGS
- Max. V = 1.75 m/s
- Min. DBG = 500 mm
- Max. DBG = 1400 mm
- Interior clear frame width or Cabin Outside : DBG 80 (mm)
- Maximum interior clear frame height : 2300 mm
- Adjustable guide shoes with the combination of cellular polyurethane Roller & liner

### INCLUDES

- Wedge Socket Bolt for for rope Ø 8, 10 or 13
- Car Steadier Brackets
- Guide shoes
- Cutting CAM Angle with Bracket

### OPTIONAL

- Isolation Frame with Rubber Pads
- Compensating rope fixing
- Oiler Cups for Guide

### SPECIAL FEATURE

- Progressive Gear CE Compliant – Certificate No : 26339
- Set on Isolation system which allows its actuation without deformation
- Guide Rail Size of 9, 10 & 16 mm
- Max. speed: 2.75 m/s & Tripping speed: 3.0 m/s

Lifts Trade manufacturers and also supplies all types of Car frames, Sheet metal, C channel and many more.



ALL TYPES OF  
**CAR SAFETY FRAMES**  
**FOR HYDRAULIC**  
**CANTILEVER HIGHPIT**



#### PRODUCTION DESCRIPTION

- Minimum Pit of 300 mm
- Suitability to Hydraulic Piston of 150 mm
- Installation for minimum 1100 mm Shaft Width & Depth
- Standard Overhead of 3000 mm
- Systems can be provided for minimum 2600 mm overhead
- Wall to CWT Guide - 95 mm to 110 mm
- CAR Guide to CABIN OUT - 140

#### GENERAL FEATURES

- Max. P+Q = 1400 KGS
- Max. V = 1.75 m/s
- Min. DBG = 500 mm
- Max. DBG = 1400 mm
- Interior clear frame width or Cabin Outside : DBG 80 (mm)
- Maximum interior clear frame height : 2300 mm
- Adjustable guide shoes with the combination of cellular polyurethane Roller & liner

#### INCLUDES

- Wedge Socket Bolt for for rope  $\varnothing$  8, 10 or 13
- Car Steadier Brackets
- Guide shoes
- Cutting CAM Angle with Bracket
- 

#### OPTIONAL

- Isolation Frame with Rubber Pads
- Compensating rope fixing
- Oiler Cups for Guide

#### SPECIAL FEATURE

- Progressive Gear CE Compliant – Certificate No : 26339
- Set on Isolation system which allows its actuation without deformation
- Guide Rail Size of 9, 10 & 16 mm
- Max. speed: 2.75 m/s & Tripping speed: 3.0 m/s

Lifts Trade manufacturers and also supplies all types of Car frames, Sheet metal, C channel and many more.



**LiftsTrade.com**

One Stop Lift Shop

ALL TYPES OF  
**CAR SAFETY FRAMES**  
**FOR HYDRAULIC**  
**CANTILEVER LOWPIT**



**PRODUCTION DESCRIPTION**

- Minimum Pit of 150 mm
- Suitability to Hydraulic Piston of 150 mm
- Installation for minimum 1100 mm Shaft Width & Depth
- Standard Overhead of 3000 mm
- Systems can be provided for minimum 2600 mm overhead
- Wall to CWT Guide - 95 mm to 110 mm
- CAR Guide to CABIN OUT - 140
- 

**GENERAL FEATURES**

- Max. P+Q = 1400 KGS
- Max. V = 1.75 m/s
- Min. DBG = 500 mm
- Max. DBG = 1400 mm
- Interior clear frame width or Cabin Outside : DBG 80 (mm)
- Maximum interior clear frame height : 2300 mm
- Adjustable guide shoes with the combination of cellular polyurethane Roller & liner

**INCLUDES**

- Wedge Socket Bolt for for rope  $\varnothing$  8, 10 or 13
- Car Steadier Brackets
- Guide shoes
- Cutting CAM Angle with Bracket

**OPTIONAL**

- Isolation Frame with Rubber Pads
- Compensating rope fixing
- Oiler Cups for Guide

**SPECIAL FEATURE**

- Progressive Gear CE Compliant – Certificate No : 26339
- Set on Isolation system which allows its actuation without deformation
- Guide Rail Size of 9, 10 & 16 mm
- Max. speed: 2.75 m/s & Tripping speed: 3.0 m/s

Lifts Trade manufacturers and also supplies all types of Car frames, Sheet metal, C channel and many more.



**LiftsTrade.com**

One Stop Lift Shop

ALL TYPES OF  
**COUNTER WEIGHT  
FRAMES  
FOR 1:1 AND 2:1**



**PRODUCTION DESCRIPTION**

- CWT frame DBG from 600 mm to 1400 mm
- CWT frame length from 2400 mm to 3000 mm
- Pulley Cover with rope slip support
- CWT frame thickness from 130 mm to 280 mm depending upon rated load

**GENERAL FEATURES**

- Max. P+Q = 1400 KGS
- Max. V = 1.75 m/s
- Min. DBG = 500 mm
- Max. DBG = 1400 mm
- Interior clear frame width for weight DBG 90 (mm)
- Maximum interior clear frame height : 2300 mm

Lifts Trade manufacturers and also supplies all types of Car frames, Sheet metal, C channel and many more.



**LiftsTrade.com**  
One Stop Lift Shop

ALL TYPES OF  
**CAR SAFETY SET**

Car and Counter Shoes

All types of Buffers

Thimble Rods

Thimbles / I Clamps

Bulldog Grips






**LiftsTrade.com**

One Stop Lift Shop

## ALL TYPES OF CAR SAFETY SET

### PROGRESSIVE AND REGULAR WEDGE BOX

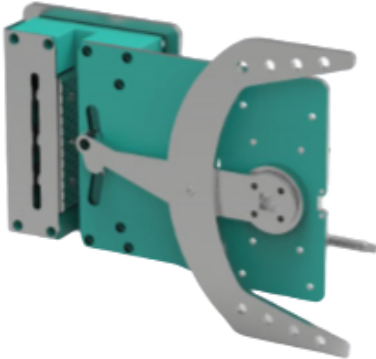

#### PRODUCT DESCRIPTION

- Safety gear acting in both upward and downward directions.
- Set on a floating system that allows
- its actuation without deforming the Car Frame / CWT Frame / GUIDE or ANY FIXING.
- Flexible delivery content including
- several options to meet a wide range of applications.

#### GENERAL FEATURES

- Min. Permissible Mass (P+Q) = 447 KGS
- Max. Permissible Mass (P+Q) = 2977 KGS
- Max. Rated Speed (Vr) = 2.75 m/s
- Max. Tripping Speed (Vt) = 3.00 m/s
- Min. Gripping Width (Gw) = 25 mm

#### INCLUDES

- OSG Linkage Bracket with Car Guide
- CTC from 125 mm to 200 mm
- Electric Switch

#### SPECIAL FEATURE

- CE Compliant – Certificate No: 26339
- Compliance with EN 81-1:1998+A3:2009 & EN 81-0/50:2014
- Oscillating System allows a lateral movement when engaging, so the braking process is more uniform.



**LiftsTrade.com**

One Stop Lift Shop

ALL TYPES OF

## MRL MACHINE BASE



### GENERAL FEATURES

- Mounted on Directly on Guide Rails.
- For MRL Standard & Cantilever Type Installation
- High Strength & easy installation.
- Rope Slack Safety Proper Guide Locking System to avoid slippage.
- No Civil Work Required.
- Suitable to all type of MRL Wire Rope & Belt Machines like Bharat, Torin Drive, Bharat Bijlee, Mona Drive, Montanari & Ghuda.

**Durable and  
reliable  
traction  
machines.  
For your  
best  
projects.**



**LiftsTrade.com**  
One Stop Lift Shop



**ALL TYPES OF  
MACHINES**

Raman Motors

Maxton Motors

Montanari Machines

Sicor Machines

Sharp Machines

Bharat Bijilee Machines

**LiftsTrade also supplies  
ALL TYPES OF  
CABINS**

Pre Coated

SS 202

SS 304

Glass

Panoramic

**HYDRAULIC LIFT KITS**

HYDRONIC

GMV

MORIS

OMAR

BLAIN





ALL TYPES OF  
**WIRING MATERIAL  
&  
CONTROL PANELS**

## LiftsTrade also supplies

Alarm +Battery

Black

Connectors

Cargate Switch

COP

Cotton Tape

Door Opening

Buzzer

Led Light

Fan

Ferules 0-9 A-Z

Flexible Pipe

Bundle

Gatti Packet

Inspection Box

Insulation Tape

Junction Box 3

Way

Limit Switches Taiwan Make

Magnets - Square

Magnets - Round

RCR

Ribbon Cable

Round Cable 4 Core

NC Pencil Sensor

No Pencil Sensor

Sleeve 10 mm

Ties Packet

Travelling cable or Flat Cable

Wire Coils

LOP

Automatic Resuce Drive

Batteries

Control Panel

Variable Voltage Drive

# FIND

## BEST ELEVATOR, STEEL DOORS & WINDOWS SOLUTION



We assure you to provide you the best quality products with an affordable pricing. For Bulk orders or any customization, you can specify your specifications so we would send you a quote for the same.

FOR LIFTS TRADE PVT. LTD.

  
Authorized Signatory

Address: LiftsTrade Pvt Ltd Plot 28 and 48, IDA Balanagar, Hyderabad, Telangana, India. 500037.

Through LiftsTrade Pvt Ltd we supply elevators, doors and windows of all types Visit: [liftstrade.com](http://liftstrade.com) Call: +91 93461 66209